

RefLED Superia Retro MR16 V2 380LM DIM 865 36 SL
0029217



Features

- Premium performance professional LED MR16 range with the same look and feel of traditional halogen MR16 lamp. Recreates backlight effect similar to halogen dichroic lamps. Full glass design - means no colours clashing between lamp and fixture. Very long lifetime of up to 25,000 hours. Switching cycles: >100,000. Colour rendering: CRI80. Lamp voltage: 12V AC/DC. Dimmable on approved dimmers. Works with magnetic and compatible electronic transformers. Warranty: 5 Years

Product Overview

Product name	RefLED Superia Retro MR16 V2 380LM DIM 865 36 SL
Technology	LED
Watt (Rated) (W)	4.4
Fixture rating	Open
General application	Education, Hospitality, Museums & Galleries, Office, Residential & Consumer, Retail
ETIM Class	EC001959
Correlated colour temperature (k)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Consistency (SDCM)	6
Colour Variation Initial (SDCM)	6
Beam Angle (°)	36
Photobiological Risk Group	RG1
Wattage (W)	4.4
Power consumption (W)	4.4
Dimmable	Yes
Average life (Nominal) (h)	25000



RefLED Superia Retro MR16 V2 380LM DIM 865 36 SL
0029217

Product EAN number	5410288292175
Warranty	5 years
Useful luminous flux (#use)	380

Technical drawings

Data table

GENERAL DATA

Product name	RefLED Superia Retro MR16 V2 380LM DIM 865 36 SL
Technology	LED
Watt (Rated) (W)	4.4
Fixture rating	Open
General application	Education, Hospitality, Museums & Galleries, Office, Residential & Consumer, Retail
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
Warranty	5 years

OPTICAL DATA

Useful luminous flux (#use)	380
Correlated colour temperature (k)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Colour Consistency (SDCM)	6
Luminous Intensity (cd)	900
Beam Angle (°)	36



RefLED Superia Retro MR16 V2 380LM DIM 865 36 SL
0029217

Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

ELECTRICAL DATA

Power consumption (W)	4.4
Wattage (W)	4.4
Equivalent watt (W)	35
Primary Supply/Product voltage - min (V)	12
Primary Supply/Product voltage - max (V)	12
Control gear required	Yes
No. Of switching cycles before premature failures	>50000
Dimmable	Yes
Inrush Current (A)	6.5
Inrush Duration (µs)	500
Lamp Energy Label (class)	F

LIFETIME DATA

Lifespan L70 B50	25000
Average life (Nominal) (h)	25000
Average life (Rated) (h)	25000

PHYSICAL DATA

Nominal Product Length (mm)	44
Nominal Product Diameter (mm)	50
Weight (kg)	0.03

PACKAGING

Product EAN number	5410288292175
Packaging single length / height (cm)	6.1
Packaging single width (cm)	5.1
Packaging single depth (cm)	8.2



RefLED Superia Retro MR16 V2 380LM DIM 865 36 SL
0029217

DUN14 (inner)	15410288292172
Units per inner package	6
Packaging inner length / height (cm)	16.4
Packaging inner width (cm)	13.2
Packaging inner depth (cm)	9.3
DUN14 (outer)	25410288292179
Units per outer package	36
Packaging outer length / height (cm)	34.6
Packaging outer width (cm)	28.2
Packaging outer depth (cm)	20.8


SAFETY DATA

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Suitable for approved transf./dimmers

Energy label



0029217

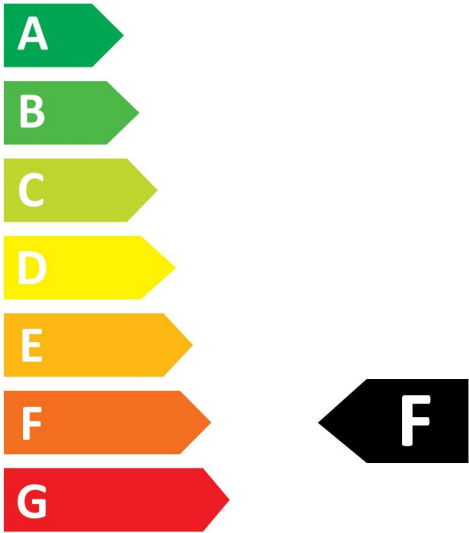


5
kWh/1000h



2019/2015



0029217

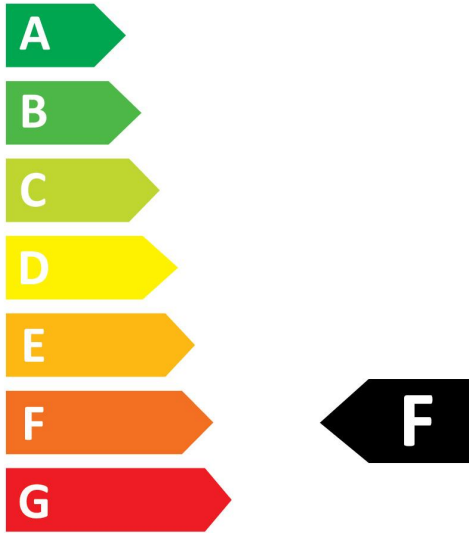

5
kWh/1000h



2019/2015