



Features


- The emergency kit enables conversion of general lighting for emergency operation. It is used for driving luminaires with forward voltages (Vf) of 50V to 200V, and built-in adaptability that allows for optimum output current based on the forward voltage of the specific light engine for a more precise match to the controlled LED scheme. Features: Suitable for independent mounting, Auto load detecting, Compatible with leading brands of mains drivers, SmartCharge technology for NiMH batteries, Test-switch function, Battery deep-discharge protection, Compatible with NiMH batteries, 3-hour rated emergency duration, Supply current (max) 25mA. Ambient temperature (ta): 0°C to +35°C. Max case temperature (tc) +70°C. Conductor size : 0.2 to 1.5mm2. DALI functionality. NiNH battery. Product contains a charging regime that prolongs battery life and reduces parasitic power consumption during the product life cycle. By controlling battery temperature this results in energy saving and reduction in maintenance costs throughout the premises.

Product Overview

|                     |                                                   |
|---------------------|---------------------------------------------------|
| Product name        | EMERGENCY PACK SELF TEST/DALI MONITORING 50V-200V |
| Technology          | Emergency Pack                                    |
| Environment         | Interior                                          |
| General application | Education, Hospitality, Office, Retail            |
| ETIM Class          | EC000471                                          |
| Product EAN number  | 5410288466033                                     |
| Warranty            | 5 years                                           |

EMERGENCY PACK SELF TEST/DALI MONITORING 50V-200V  
0046603

Technical drawings

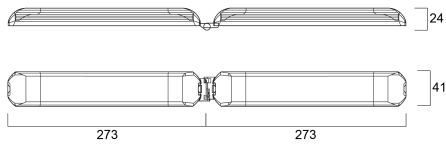

Data table

GENERAL DATA

|                     |                                                   |
|---------------------|---------------------------------------------------|
| Product name        | EMERGENCY PACK SELF TEST/DALI MONITORING 50V-200V |
| Technology          | Emergency Pack                                    |
| Environment         | Interior                                          |
| General application | Education, Hospitality, Office, Retail            |
| ETIM Class          | EC000471                                          |
| Warranty            | 5 years                                           |

ELECTRICAL DATA

|                       |    |
|-----------------------|----|
| Control gear required | No |
|-----------------------|----|

PHYSICAL DATA

|             |      |
|-------------|------|
| Weight (kg) | 0.47 |
|-------------|------|

PACKAGING

|                                       |                |
|---------------------------------------|----------------|
| Product EAN number                    | 5410288466033  |
| Packaging single length / height (cm) | 28.5           |
| Packaging single width (cm)           | 10.0           |
| Packaging single depth (cm)           | 4.5            |
| DUN14 (inner)                         | 05410288466033 |



EMERGENCY PACK SELF TEST/DALI MONITORING 50V-200V  
0046603

|                                      |      |
|--------------------------------------|------|
| Units per inner package              | 1    |
| Units per outer package              | 25   |
| Packaging outer length / height (cm) | 46.0 |
| Packaging outer width (cm)           | 31.0 |
| Packaging outer depth (cm)           | 30.0 |

SAFETY DATA

|                                     |     |
|-------------------------------------|-----|
| Special purpose lamp                | No  |
| Dry applications use only           | Yes |
| Suitable for household illumination | No  |