


Insaver Slim 225 IP54 DALI 4850lm 830
0030358

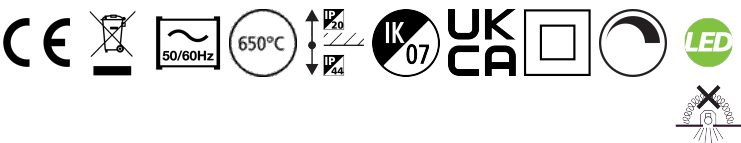

Features

- Insaver Slim is a ceiling recessed LED downlight (IP54 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, Dimmable DALI driver of TRIDONIC (Driver LC 45W 450-1050mA 54V o4a NF SR EXC3 875000923), 41W; 4850lm; 118lm/W; 3000K; UGR <22 with shallow product depth 65mm. Meets TP(a) requirements.


Product Overview

Product name	Insaver Slim 225 IP54 DALI 4850lm 830
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4278081
Fixture luminous flux (lm)	4850
Luminaire efficacy (lm/W)	118
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	59
Beam Angle (°)	NA
Glare control	< 22
Photobiological Risk Group	RG1
Total power consumption (W)	41
Electrical protection	Class II

Insaver Slim 225 IP54 DALI 4850lm 830 0030358

Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9003
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288303581
Warranty	5 years
Built in presence detector	NONE
Virtual assistant compatibility	N/A
Dimming method	DALI
Colour Code	830

Photometry

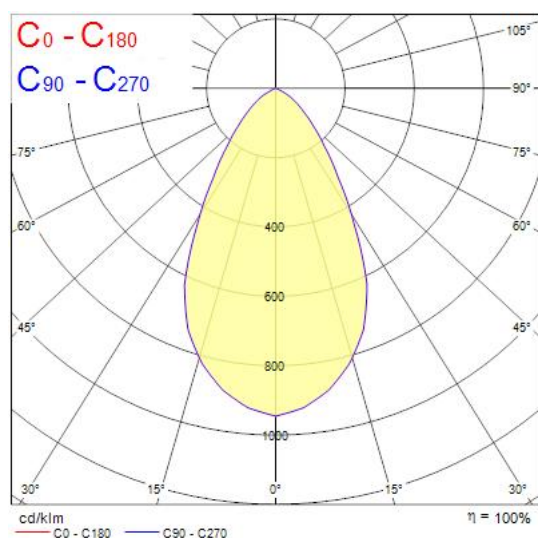

Technical drawings

