



Features

• Insaver Slim is a ceiling recessed LED downlight (IP65 from the front and back), Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 20W; 2400lm; 120lm/W; 4000K; UGR <19 with shallow product depth 60mm. IK07 for the fixture, IK03 for the IP driver box. When using with EM kit (0046600& 0046601), protection IP65 kept only from the front. Meets TP(a) requirements.


Product Overview

Product name	Insaver Slim UGR19 IP65 205 2400lm 840
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4579583
Fixture luminous flux (lm)	2400
Luminaire efficacy (lm/W)	120
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	60
Beam Angle (°)	NA
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	20
Electrical protection	Class II

Insaver Slim UGR19 IP65 205 2400lm 840 0030457

Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9003
IP rating	IP65
IK rating	IK07
Product EAN number	5410288304571
Warranty	5 years
Built in presence detector	NONE
Virtual assistant compatibility	N/A
Dimming method	N/A

Photometry

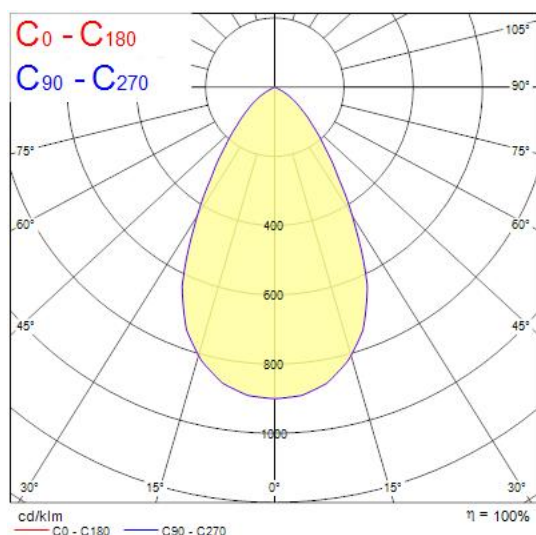

Technical drawings

