

Features

- Insaver is a ceiling recessed LED downlight (IP54 from the front), with integrated PIR sensor with time (up to 8 mins) and daylight lux level settings. Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 9.5W; 1200lm; 126lm/W; 4000K; UGR <19 with shallow product depth 50mm. Meets TP(a) requirements.

Product Overview


Product name	Insaver UGR19 IP54 175 1200lm 840 PIR
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4278518
Fixture luminous flux (lm)	1200
Luminaire efficacy (lm/W)	126
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	9.5
Electrical protection	Class II
Control gear type	LED driver constant current

Light your world


Insaver UGR19 IP54 175 1200lm 840 PIR 0030519

Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9010
IP rating	IP54/20
IK rating	IK07
Product EAN number	5410288305196
Warranty	5 years
Built in presence detector	PIR
Virtual assistant compatibility	N/A
Dimming method	N/A

Photometry

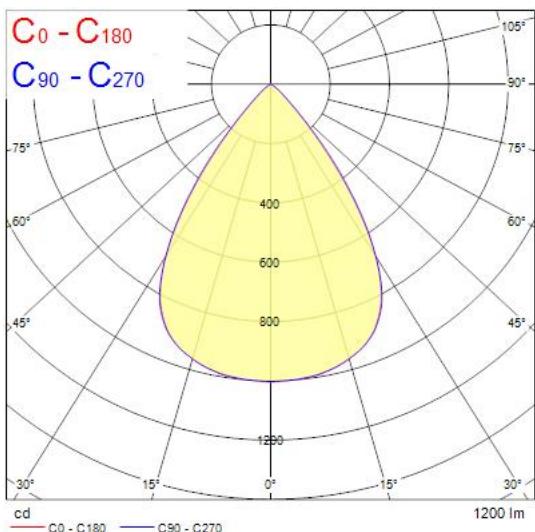

Technical drawings

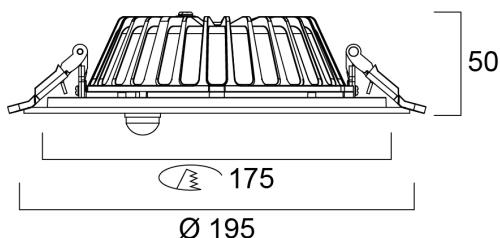

Light your world