



Features

- Insaver is a ceiling recessed LED downlight (IP54 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, Dimmable DALI driver of TRIDONIC (LCA 25W 350–1050mA one4all SR PRE 28000671), 20W; 2500lm; 125lm/W; 4000K; UGR <19 with shallow product depth 60mm. Meets TP(a) requirements.

Product Overview


Product name	Insaver UGR19 IP54 205 2500lm 840 DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4278524
Fixture luminous flux (lm)	2500
Luminaire efficacy (lm/W)	125
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Beam Angle (°)	NA
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	20
Electrical protection	Class II

Light your world

Insaver UGR19 IP54 205 2500lm 840 DALI 0030539

Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9010
IP rating	IP54/20
IK rating	IK07
Product EAN number	5410288305394
Warranty	5 years
Built in presence detector	NONE
Virtual assistant compatibility	N/A
Dimming method	DALI-2, Switch-dim (mains-rated)
Colour Code	840

Photometry

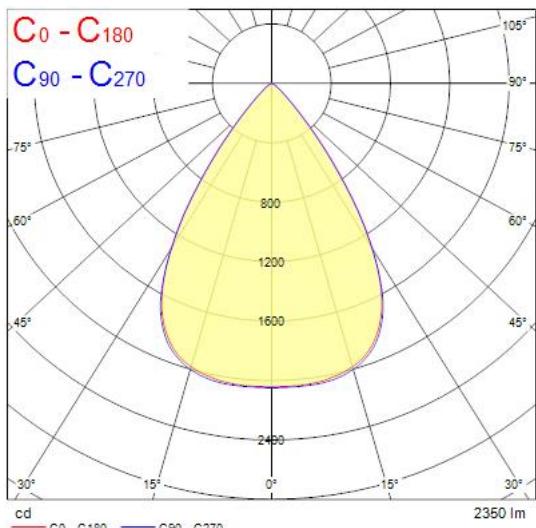

Technical drawings

