

**INSAVER IP54 225 4800LM 830 DALI**  
**0030540**



## Features

- Insaver is a ceiling recessed LED downlight (IP54 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, Dimmable DALI driver of KGP CC44W700-1050 DALI), 41W; 4800lm; 117lm/W; 3000K; UGR <22 with shallow product depth 65mm. Meets TP(a) requirements.


## Product Overview

Product name	INSAVER IP54 225 4800LM 830 DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4278536
Fixture luminous flux (lm)	4800
Luminaire efficacy (lm/W)	117
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Beam Angle (°)	NA
Glare control	< 22
Photobiological Risk Group	RG1
Total power consumption (W)	41
Electrical protection	Class II

INSAVER IP54 225 4800LM 830 DALI  
0030540

Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9010
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288305400
Warranty	5 years
Dimming method	DALI-2, Switch-dim (mains-rated)
Colour Code	830

Photometry

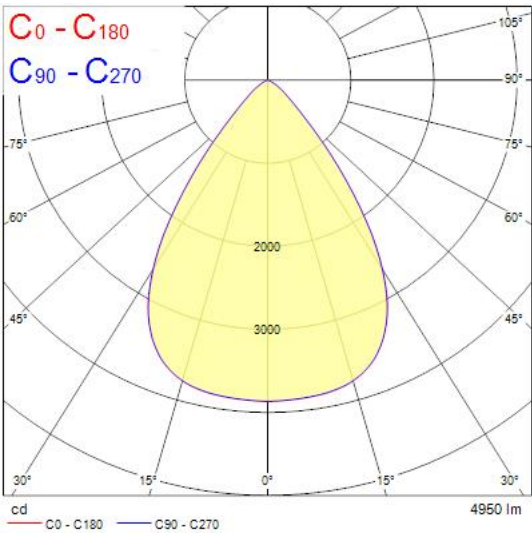

Technical drawings

