


ST Panel UGR19 1200x300 HE IP44 4100 840 LILO
0042635

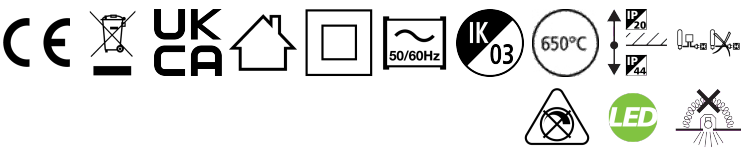

Features

- START Panel IP44 is a range of backlit LED panels used in recessed ceilings. Ideal for general indoor applications such as corridors, breakrooms, offices and meeting rooms. Luminaire dimensions are compatible with common ceiling installation, and the shallow design makes it easy to install in low ceilings. Nominal size 1200x300mm, 4100Lm; 34W; 121Lm/W; Average lifespan: 100.000Hrs; 4000K; CRI 80; Glare control <19; IK03; IP44 (from the front); SDCM<3; Class II; Loop in loop out connector for quick installation.


Product Overview

Product name	ST Panel UGR19 1200x300 HE IP44 4100 840 LILO
Technology	LED
Cap/Base	N/A
Housing	Aluminium, Steel
Mount	Ceiling recessed mounting
General application	Education, Office
ETIM Class	EC002892
E-number FI	4278343
Fixture luminous flux (lm)	4100
Luminaire efficacy (lm/W)	121
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	90
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	34
Electrical protection	Class II

ST Panel UGR19 1200x300 HE IP44 4100 840 LILO
0042635

Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9003
IP rating	IP44/20
IK rating	IK03
Product EAN number	5410288426358
Warranty	5 years
Built in presence detector	NONE
Virtual assistant compatibility	N/A
Dimming method	N/A

Photometry

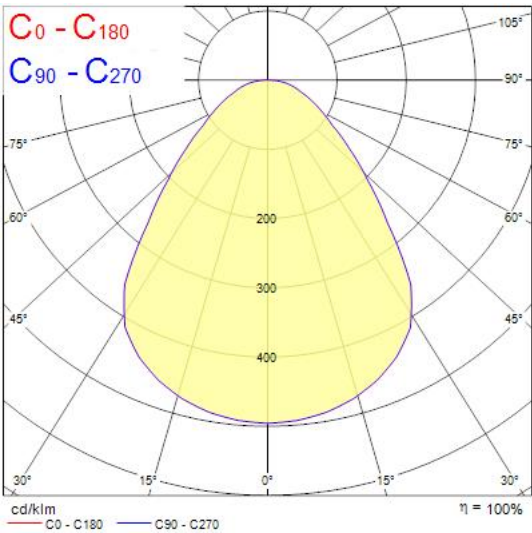

Technical drawings

