


START PANEL IP54 UGR19 TW 1200x300 4300LM SSC
0042708

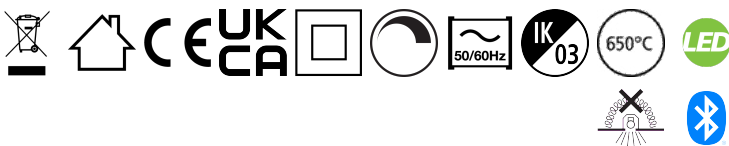

Features

- START Panel IP54 Tunable White is a range of backlit LED panels with adjustable colour temperature ranging from 3000-5400K. Ideal for general indoor applications such as corridors, breakrooms, offices and meeting rooms. Luminaire dimensions are compatible with common ceiling installation, and the shallow design makes it easy to install in low ceilings. Nominal size 1200x300mm, 4320Lm; 38W; 114Lm/W; Average lifespan: 100.000Hrs; CRI 80; Glare control <19; IK03; IP54 (from the front); SDCM<3; Class II; Loop in loop out connector for quick installation. Tp(a) rated diffuser. SylSmart Standalone (SSC) enabled. Not compatible with surface mounting frames.


Product Overview

Product name	START PANEL IP54 UGR19 TW 1200x300 4300LM SSC
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Hospitality, Logistics & Industry, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	4320
Luminaire efficacy (lm/W)	114
Light colour	Tuneable White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	85
Glare control	< 19
Photobiological Risk Group	RG0

START PANEL IP54 UGR19 TW 1200x300 4300LM SSC
0042708

Total power consumption (W)	38
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	5
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9003
IP rating	IP54/20
IK rating	IK03
Product EAN number	5410288427089
Warranty	5 years
Built in presence detector	NONE
Virtual assistant compatibility	N/A
Dimming method	SylSmart SSC
Colour Code	N/A

Photometry

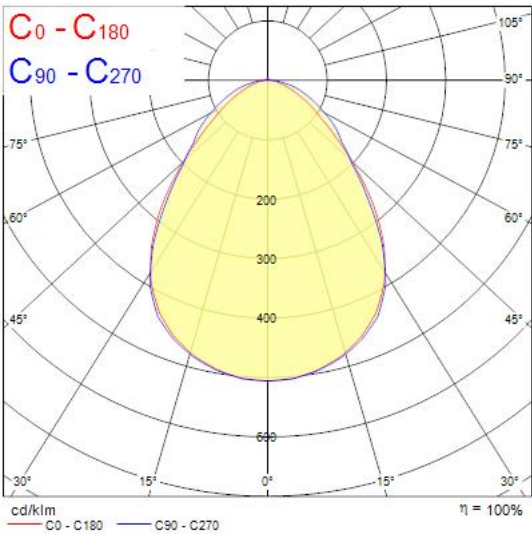

Technical drawings

