

Features

• Quantum is a range of recessed integrated LED panels for general indoor lighting applications such as breakout areas, offices and meeting rooms. Max. drive current: 600mA; Max. power: 28W; Lifespan: 120.000Hrs L70:B50; 4000K; CRI 80; Efficacy up to: 161Lm/W; Fixture lumen: 4500lm; Lumen output using EM kit: ~500lm; Glare control <19; IK03; IP54 (from the front); Class II; DALI dimmable. Tp(a) rated diffuser that self-extinguishes within 5 sec when a flame has been removed.


Product Overview

Product name	Quantum IP54 600x600 DALI 4500lm 840
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Office, Education
ETIM Class	EC002892
E-number FI	4279433
Fixture luminous flux (lm)	4500
Luminaire efficacy (lm/W)	161
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	85
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	28
Electrical protection	Class II

Quantum IP54 600x600 DALI 4500lm 840
0044644

Control gear type	LED driver constant current
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9003
IP rating	IP54/20
IK rating	IK03
Product EAN number	5410288446448
Warranty	5 years
Built in presence detector	NONE
Virtual assistant compatibility	N/A
Dimming method	DALI-2

Photometry

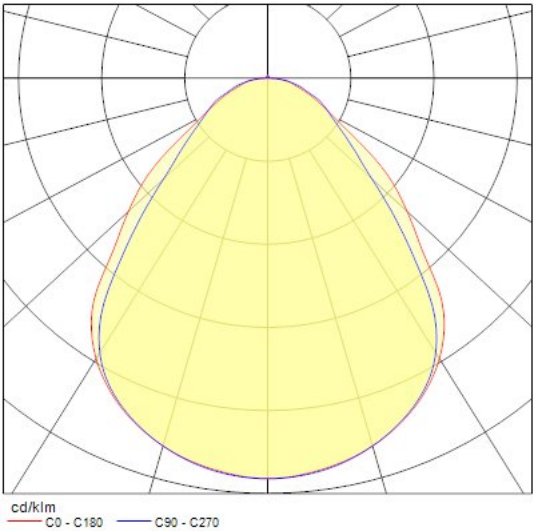

Technical drawings

