



Features

- The DALI emergency pack enables conversion of general lighting for emergency operation. It provides benefits by enabling testing and monitoring of an emergency lighting system either on-site or via an internet connection. The product defaults to standalone AutoTest when not connected to a DALI network. The pack is used for driving luminaires with forward voltages (Vf) of 6V to 55V, and built-in adaptability that allows for optimum output current based on the forward voltage of the specific light engine for a more precise match to the controlled LED scheme. Features: 3W power consumption with approx 300 lumens light output, Suitable for independent mounting, Auto load detecting, Compatible with leading brands of mains drivers, SmartCharge technology for NiMH batteries, Test-switch function, Battery deep discharge protection, Compatible with NiMH batteries, 3-hour rated emergency duration, SELV output, DALI functionality. Supply current (max) 25mA. Ambient temperature (ta): 0°C to +35°C. Max case temperature (tc) +70°C. Conductor size : 0.2 to 1.5mm². NiMH battery. Product contains a charging regime that prolongs battery life and reduces parasitic power consumption during the product life cycle. By controlling battery temperature this results in energy saving and reduction in maintenance costs throughout the premises.

Product Overview

Product name	EMERGENCY PACK SELF TEST/DALI MONITORING 6V-55V
Technology	Emergency Pack
General application	Hospitality, Museums & Galleries, Office, Residential & Consumer, Retail
ETIM Class	EC000471
Product EAN number	5410288466019

Light your world


SYLVANIA

EMERGENCY PACK SELF TEST/DALI MONITORING 6V-55V
0046601

Warranty

5 years

Technical drawings

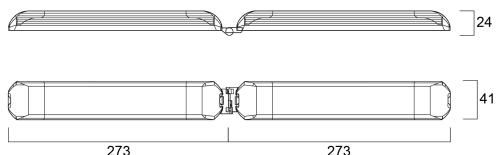

Light your world