



### Features

- START Panel IP54 is a range of recessed integrated LED panels for general indoor lighting applications such as breakout areas, offices and meeting rooms. Max. drive current: 165mA; Max. power: 35W; Average lifespan: 100.000Hrs; 4000K; CRI 80; Efficacy up to: 146Lm/W; Fixture lumen up to: 5100lm; IK03; IP54 (from the front); Class II; DALI dimmable.

### Product Overview


<b>Product name</b>	START PANEL IP54 600 4750LM 840 DALI
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling recessed mounting
<b>General application</b>	Education, Office
<b>ETIM Class</b>	EC002892
<b>E-number FI</b>	4274193
<b>Fixture luminous flux (lm)</b>	4750
<b>Luminaire efficacy (lm/W)</b>	130
<b>Correlated colour temperature (k)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Beam Angle (°)</b>	107
<b>Glare control</b>	< 25
<b>Photobiological Risk Group</b>	RG0
<b>Total power consumption (W)</b>	36
<b>Electrical protection</b>	Class I

Light your world

## START PANEL IP54 600 4750LM 840 DALI 0047783

Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP54/20
IK rating	IK03
Product EAN number	5410288477831
Warranty	5 years
Built in presence detector	NONE
Virtual assistant compatibility	N/A
Dimming method	DALI

### Photometry

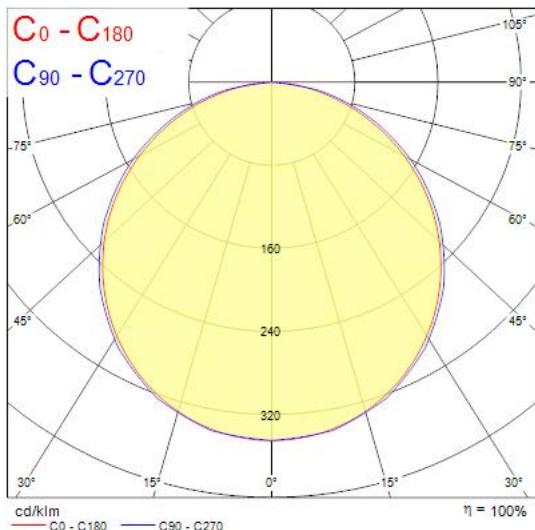

### Technical drawings

