

### Features

- Exterior LED Floodlight, comes complete with 1500mm flying lead and adjustable bracket, aluminium housing, clear glass diffuser, IP66, IK08, Class I, 4000K, Non-dimming, 41800lm, 300W, 139lm/W, CRI80, Symmetrical Wide beam angle (60°), 100000 hrs L80B20 lifespan, 567 x 465 x 97mm (LxWxD) dimensions, 9.6kg weight.

### Product Overview

Product name	Kalani IP66 39KLM 840 WB
Technology	LED
Cap/Base	N/A
General application	Logistics & Industry
ETIM Class	EC001744
E-number FI	4579573
Fixture luminous flux (lm)	41800
Luminaire efficacy (lm/W)	139
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	60
Photobiological Risk Group	RG1
Total power consumption (W)	300
Electrical protection	Class I
Dimmable	No
IP rating	IP66
IK rating	IK08
Product EAN number	5410288485423

Kalani IP66 39KLM 840 WB  
0048542


Warranty

5 years

Dimming method

N/A

## Photometry

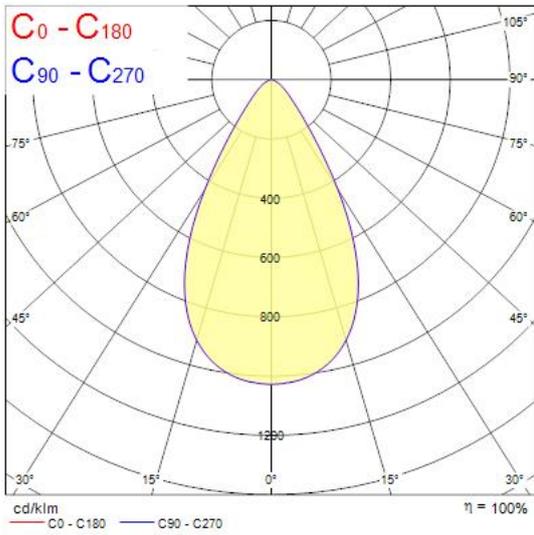

## Technical drawings

