

Features

- LED batten, T8 replacement, ease of installation through 2 part push-in design of the housing (safety cable included), through wiring capability, steel housing, 5200lm, 36W, 144lm/W, 4000K, CRI80, 3 step MacAdam ellipse, symmetric wide beam angle, Class I, 90000 hrs L80B20 lifespan, non-dimmable driver, IK08, IP20, 1523 x 70 x 76.5mm (LxWxD) dimensions, 1.72kg weight.


Product Overview

Product name	Wayline 1500 5200lm 840
Technology	LED
Cap/Base	N/A
Housing	Steel
General application	Logistics & Industry
ETIM Class	EC000109
E-number FI	4278293
Fixture luminous flux (lm)	5200
Luminaire efficacy (lm/W)	144
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	115
Photobiological Risk Group	RG1
Total power consumption (W)	36
Electrical protection	Class I
Dimmable	No
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL9016
IP rating	IP20
IK rating	IK08

Wayline 1500 5200lm 840  
**0048914**

Product EAN number	5410288489148
Warranty	5 years
Dimming method	N/A

**Photometry**

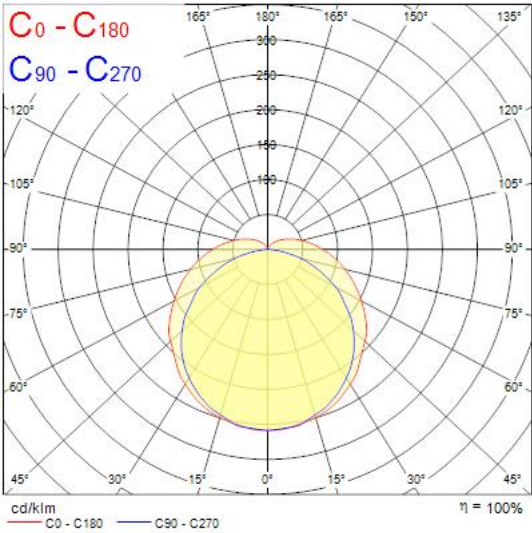

**Technical drawings**

