



Features


- LED batten, T8 replacement, ease of installation through 2 part push-in design of the housing (safety cable included), through wiring capability, steel housing, 8400lm, 60W, 140lm/W, 4000K, CRI80, 3 step MacAdam ellipse, symmetric wide beam angle, Class I, 90000 hrs L80B20 lifespan, non-dimmable driver, IK08, IP20, 1523 x 70 x 76.5mm (LxWxD) dimensions, 1.87kg weight.



Product Overview

Cap/Base	N/A
Correlated colour temperature (k)	4000
Colour Variation Initial (SDCM)	3
Electrical protection	Class I
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL9016

Photometry

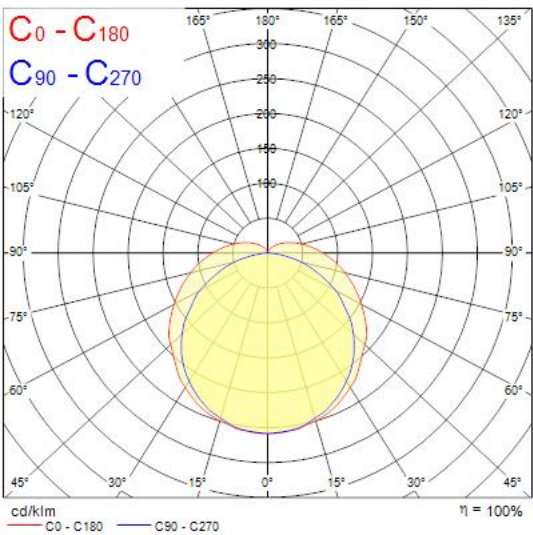

Technical drawings

