



Features

• LED batten, T8 replacement, ease of installation through 2 part push-in design of the housing, Traffic white (RAL9016) iron housing, 6700 / 7100lm, 51.5W, 130/138lm/W, Integrated switch allows to choose between warm white (3000K) and neutral white (4000K) colour temperatures, CRI80, 3 step MacAdam ellipse, symmetric wide beam angle, Class I, 120000 hrs L70B50 lifespan, DALI driver (with built-in switch-dim capability), IK08, IP20, 1500 x 64 x 65mm (LxWxH) dimensions, 1.75kg weight. BESA compatibility. End cap incorporates 20mm conduit knock out.


Product Overview

Product name	Start Batten 1500 7000lm DALI 830/840
Technology	LED
Cap/Base	N/A
Housing	Steel
General application	Logistics & Industry
ETIM Class	EC000109
E-number FI	4279489
Fixture luminous flux (lm)	7100
Luminaire efficacy (lm/W)	138
Light colour	Warm White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	145x110
Photobiological Risk Group	RG1
Total power consumption (W)	51.5
Electrical protection	Class I
Control gear type	LED driver constant current

Start Batten 1500 7000lm DALI 830/840
0048984

Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP20
IK rating	IK08
Product EAN number	5410288489841
Warranty	5 years
Built in presence detector	NONE
Virtual assistant compatibility	N/A
Dimming method	DALI-2

Photometry

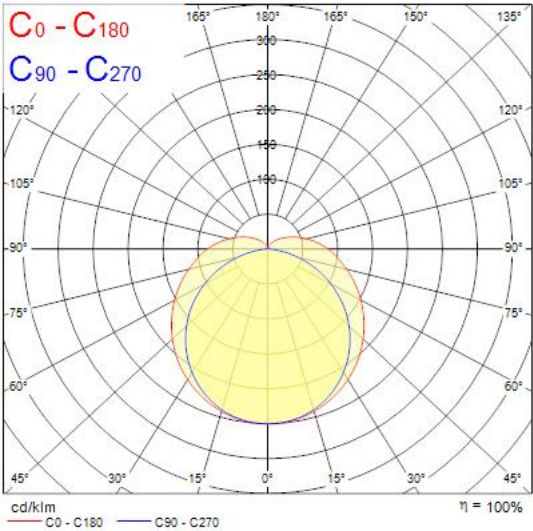

Technical drawings

