

INTERRATA ADJUSTABLE L IP67 CLEAR 2000LM 830 MB
0049044



Features

- Round shaped in-ground luminaire with +/-30° adjustable light module, drive-over for pressure loads to 2000kg (20kN), comes with 2m 3x1mm² flying lead and recessing tube, aluminium housing with Stainless steel (SS316) decorative ring and clear glass diffuser, IP67, IK10, Class I, non-dimmable, 2000lm, 29W, 69lm/W, CRI80, 25° beam angle, 50000 hrs L70 B50 lumen maintenance, 260mm diameter, 265mm recessing tube height, 3.5kg weight.


Product Overview

Product name	INTERRATA ADJUSTABLE L IP67 CLEAR 2000LM 830 MB
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ground recessed
General application	Hospitality, Museums & Galleries, Office, Residential & Consumer
ETIM Class	EC000758
E-number FI	4579507
Fixture luminous flux (lm)	2000
Luminaire efficacy (lm/W)	69
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	25
Photobiological Risk Group	RG1
Total power consumption (W)	29
Electrical protection	Class I
Dimmable	No

INTERRATA ADJUSTABLE L IP67 CLEAR 2000LM 830 MB 0049044

LED Flickering Rate	Low (6% - 20%)
Housing colour	Stainless steel
IP rating	IP67
IK rating	IK10
Product EAN number	5410288490441
Warranty	5 years
Colour Code	830

Photometry

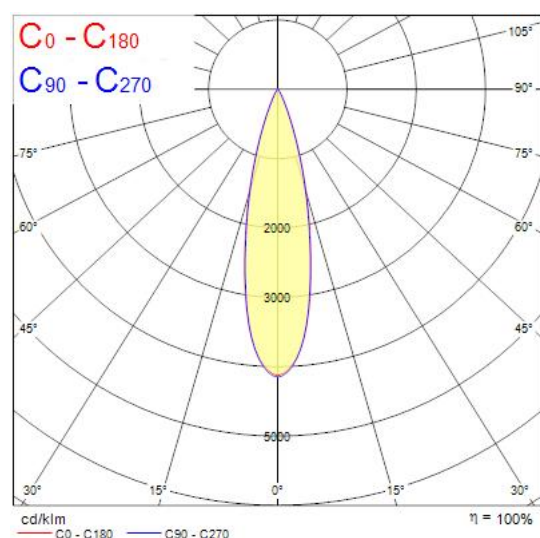

Technical drawings

