

START SURFACE IP66 1500LM 840 IK10 DALI WHT
0049246



Features

- LED exterior surface mounted luminaire, 350mm diameter, 1500lm as max. lumen output, 16W power consumption, 94lm/W efficacy, 4000K color temperature, CRI80, IP66, IK10, 60,000 hours (L70), white housing, vandal resistant. DALI and DALI 2 dimming compatibility, supplied with anti-theft screws


Product Overview

Product name	START SURFACE IP66 1500LM 840 IK10 DALI WHT
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Environment	Indoor, Outdoor
General application	Hospitality
ETIM Class	EC002892
Fixture luminous flux (lm)	1500
Luminaire efficacy (lm/W)	94
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	120
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	16
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Integrated

START SURFACE IP66 1500LM 840 IK10 DALI WHT 0049246

Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9003
IP rating	IP66
IK rating	IK10
Product EAN number	5410288492469
Warranty	5 years
Built in presence detector	NONE
Dimming method	DALI
Colour Code	840

Photometry

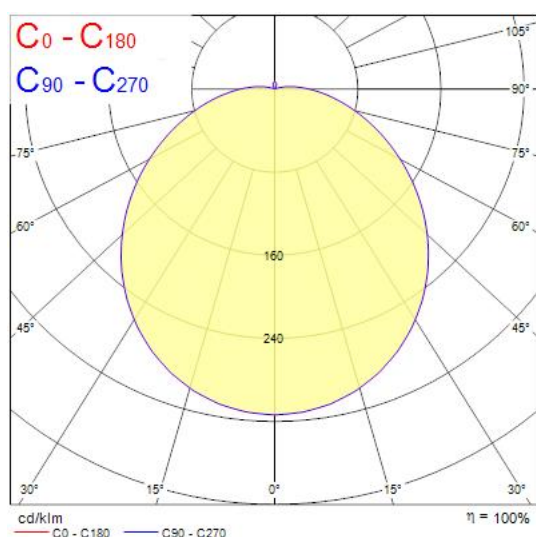

Technical drawings

