

### Features

- The streamlined, durable, lightweight die-cast aluminium body makes Start Flood Flat a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. Black (RAL9017) housing, white reflector, 3000 lm, 28 W, 107 lm/W, 4000K, non dimmable, CRI>80, IP54, IK06 - fixture, IK05 - sensor, Class I, lifespan L70:B50: 90000 hrs, 201 x 156 x 57 mm (L x W x H). Weight: 0.575kg. PIR sensor included.

### Product Overview

Product name	Start Flood Flat IP54 PIR 3000LM 840 Black
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Wall surface mounted, Ceiling surface mounting
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4579542
Fixture luminous flux (lm)	3000
Luminaire efficacy (lm/W)	107
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	110
Photobiological Risk Group	RG1
Total power consumption (W)	28.0


Light your world

## Start Flood Flat IP54 PIR 3000LM 840 Black

**0050138**

<b>Electrical protection</b>	Class I
<b>Control gear type</b>	LED driver constant current
<b>Dimmable</b>	No
<b>LED Flickering Rate</b>	Low (6% - 20%)
<b>Housing colour</b>	Black
<b>IP rating</b>	IP54
<b>IK rating</b>	IK06
<b>Product EAN number</b>	5410288501383
<b>Warranty</b>	3 years
<b>Built in presence detector</b>	PIR
<b>Virtual assistant compatibility</b>	N/A
<b>Dimming method</b>	N/A

### Photometry

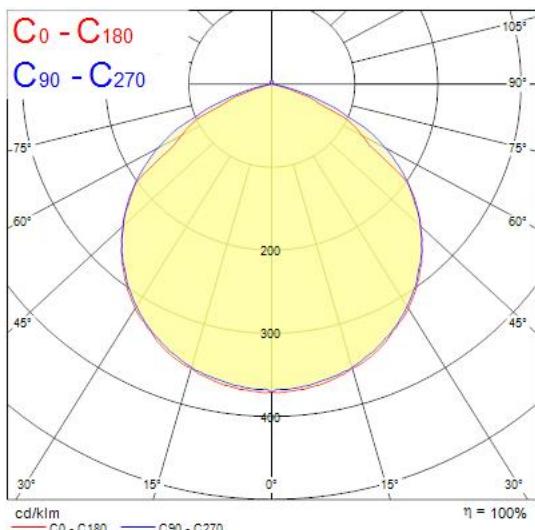

### Technical drawings

