

## START Downlight Flat 157 IP44 1000LM 830 DIM 0054120



### Features

- START Downlight Flat IP44 DIM is an integrated LED recessed downlight with a separate, phase dimmable driver and loop in- out box, 12W; 1000Lm; 83Lm/W; 3000K; IP44 rated from the front.


### Product Overview

Product name	START Downlight Flat 157 IP44 1000LM 830 DIM
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality
ETIM Class	EC001744
E-number FI	4278493
Fixture luminous flux (lm)	1000
Luminaire efficacy (lm/W)	83
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	120
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	12
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)

## START Downlight Flat 157 IP44 1000LM 830 DIM 0054120

Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK06
Product EAN number	5410288541204
Warranty	5 years
Dimming method	Mains: leading / trailing edge
Useful luminous flux (#use)	1000

### Photometry

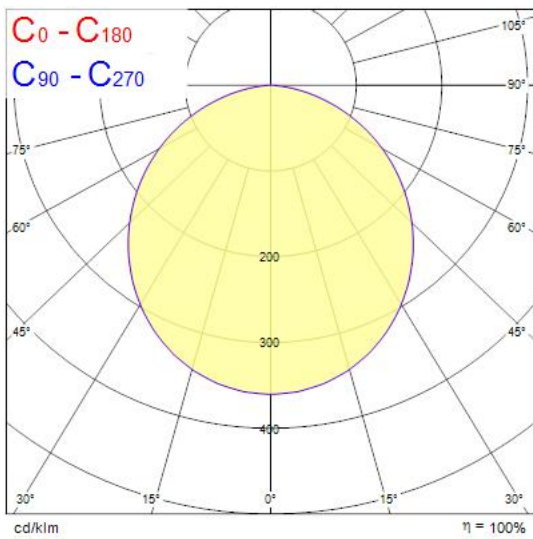

### Technical drawings

