

START Downlight Flat 157 IP44 1100LM 840 DIM
0054121



Features

- START Downlight Flat IP44 DIM is an integrated LED recessed downlight with a separate, phase dimmable driver and loop in- out box, 12W; 1100Lm; 92Lm/W; 4000K; IP44 rated from the front.




Product Overview

Product name	START Downlight Flat 157 IP44 1100LM 840 DIM
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality
ETIM Class	EC001744
E-number FI	4278495
Fixture luminous flux (lm)	1100
Luminaire efficacy (lm/W)	92
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	120
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	12
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)

START Downlight Flat 157 IP44 1100LM 840 DIM 0054121

Housing colour	RAL9003
IP rating	IP44/20
IK rating	IK06
Product EAN number	5410288541211
Warranty	5 years
Built in presence detector	NONE
Virtual assistant compatibility	N/A
Dimming method	Mains: leading / trailing edge

Photometry

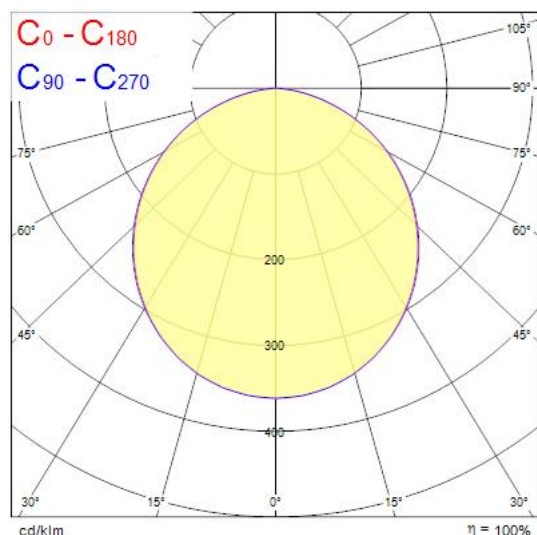

Technical drawings

