

START Downlight Flat 226 1700LM 830 DIM SM 0054128



Features

- START Downlight Flat DIM Surface is an integrated LED surface mounted downlight with a separate, phase dimmable driver and loop in- out box, 17W; 1700Lm; 100Lm/W; 3000K; IP20.


Product Overview

Product name	START Downlight Flat 226 1700LM 830 DIM SM
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting
General application	Hospitality
ETIM Class	EC001744
E-number FI	4278503
Fixture luminous flux (lm)	1700
Luminaire efficacy (lm/W)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	120
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	17
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)

START Downlight Flat 226 1700LM 830 DIM SM 0054128

Housing colour	RAL9003
IP rating	IP20
IK rating	IK06
Product EAN number	5410288541280
Warranty	5 years
Dimming method	Mains: leading / trailing edge
Useful luminous flux (#use)	1700

Photometry

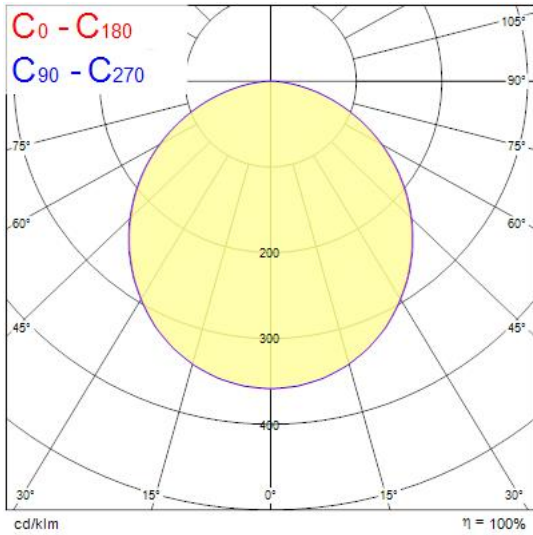

Technical drawings

