

## START Downlight Flat 226 1750LM 840 DIM SM 0054129



### Features

- START Downlight Flat DIM Surface is an integrated LED surface mounted downlight with a separate, phase dimmable driver and loop in- out box, 17W; 1750Lm; 103Lm/W; 4000K; IP20.


### Product Overview

<b>Product name</b>	START Downlight Flat 226 1750LM 840 DIM SM
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	Aluminium
<b>Mount</b>	Ceiling surface mounting
<b>General application</b>	Hospitality
<b>ETIM Class</b>	EC001744
<b>E-number FI</b>	4278504
<b>Fixture luminous flux (lm)</b>	1750
<b>Luminaire efficacy (lm/W)</b>	103
<b>Correlated colour temperature (k)</b>	4000
<b>Light colour</b>	Cool White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Beam Angle (°)</b>	120
<b>Glare control</b>	< 28
<b>Photobiological Risk Group</b>	RG0
<b>Total power consumption (W)</b>	17
<b>Electrical protection</b>	Class II
<b>Control gear type</b>	LED driver constant current
<b>Dimmable</b>	Yes
<b>LED Flickering Rate</b>	Ultra low (5% or less)

## START Downlight Flat 226 1750LM 840 DIM SM 0054129

Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK06
Product EAN number	5410288541297
Warranty	5 years
Dimming method	Mains: leading / trailing edge
Useful luminous flux (#use)	1750

### Photometry

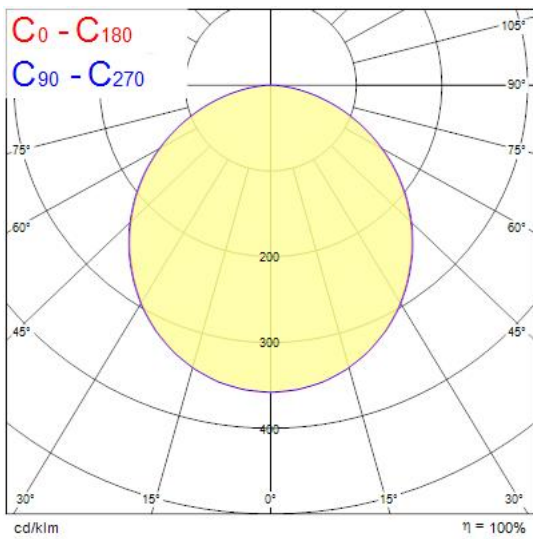

### Technical drawings

