

# Concord

Solstice 150 2000lm 940 SSC01D  
2070140



## Features

- The Solstice 150 2000lm 940 SSC is a high efficient SSC dimmable downlight luminaire, Colour rendering index Ra>90, Colour temperature: 4000K Neutral White, Class II, Protection rating IP40/IP20, Cut out dimensions: 150mm.

## Product Overview


Product name	Solstice 150 2000lm 940 SSC01D
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4262051
Fixture luminous flux (lm)	2000
Luminous flux (lm)	2000
Luminaire efficacy (lm/W)	133
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Glare control	< 19

# Concord

## Solstice 150 2000lm 940 SSC01D 2070140

Photobiological Risk Group	RG0
Total power consumption (W)	15
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK02
Product EAN number	5025768701407
Warranty	5 years
Dimming method	SylSmart SSC
Useful luminous flux (#use)	2000

### Photometry

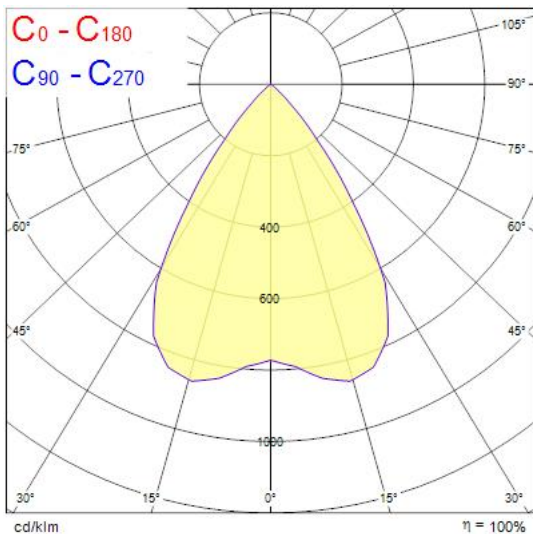

### Technical drawings

