


Concord

Solstice 150 IP65 1700lm 930 DALI
2070171

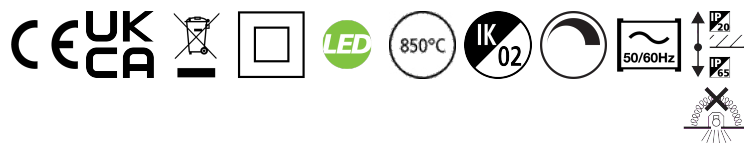

Features

- The Solstice 150 IP65 1700lm 930 DALI is a high efficient DALI dimmable downlight luminaire, Colour rendering index Ra>90, Colour temperature: 3000K Warm White, Class II, Protection rating IP65/IP20, Cut out dimensions: 150mm.

Product Overview


Product name	Solstice 150 IP65 1700lm 930 DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4170379
Fixture luminous flux (lm)	1700
Luminous flux (lm)	1700
Luminaire efficacy (lm/W)	113
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Glare control	< 19

Concord

Solstice 150 IP65 1700lm 930 DALI 2070171

Photobiological Risk Group	RG1
Total power consumption (W)	15
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP65/20
IK rating	IK02
Product EAN number	5025768701711
Warranty	5 years
Dimming method	DALI, DALI-2, Switch-dim (mains-rated)
Useful luminous flux (#use)	1700

Photometry

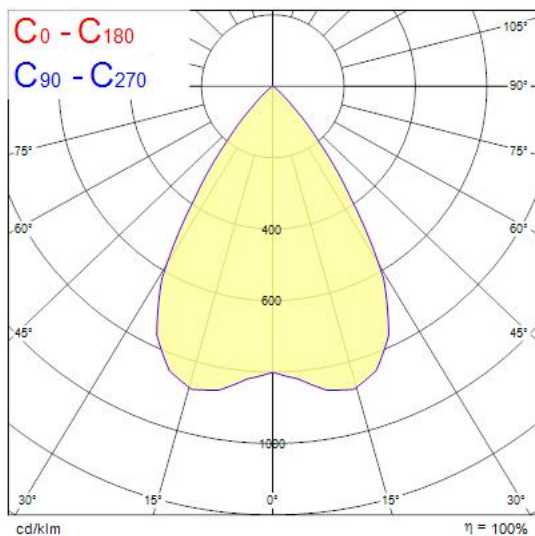

Technical drawings

