


Concord

Solstice 150 IP65 1900lm 940 DALI
2070172

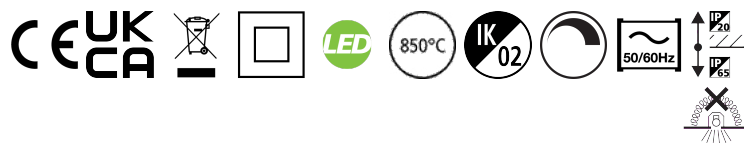

Features

- The Solstice 150 IP65 1900lm 940 DALI is a high efficient DALI dimmable downlight luminaire, Colour rendering index Ra>90, Colour temperature: 4000K Neutral White, Class II, Protection rating IP65/IP20, Cut out dimensions: 150mm.

Product Overview


Product name	Solstice 150 IP65 1900lm 940 DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4170380
Fixture luminous flux (lm)	1900
Luminous flux (lm)	1900
Luminaire efficacy (lm/W)	127
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Glare control	< 19

Concord

Solstice 150 IP65 1900lm 940 DALI 2070172

Photobiological Risk Group	RG1
Total power consumption (W)	15
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP65/20
IK rating	IK02
Product EAN number	5025768701728
Warranty	5 years
Dimming method	DALI, DALI-2, Switch-dim (mains-rated)
Useful luminous flux (#use)	1900

Photometry

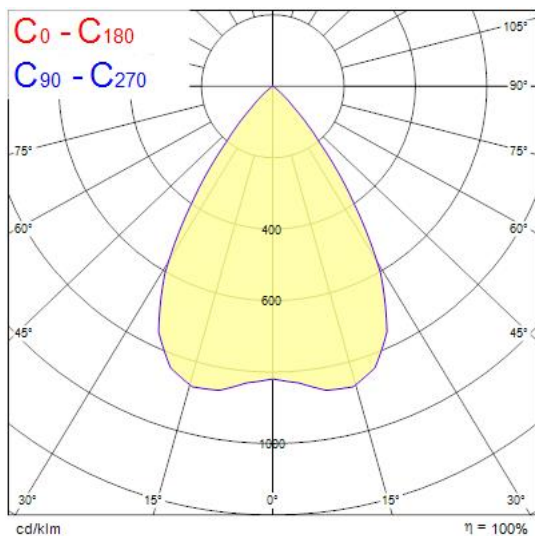

Technical drawings

