

Concord

Solstice 200 1700lm 930 SSC01D GB
2070237



Features

- The Solstice 200 1700lm 930 SSC GB is a high efficient SSC GB dimmable downlight luminaire, Colour rendering index Ra>90, Colour temperature: 3000K Warm White, Class II, Protection rating IP40/IP20, Cut out dimensions: 200mm.

Product Overview


Product name	Solstice 200 1700lm 930 SSC01D GB
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Retail
ETIM Class	EC001744
E-number FI	4262096
Fixture luminous flux (lm)	1700
Luminous flux (lm)	1700
Luminaire efficacy (lm/W)	100
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Glare control	< 20

Concord

Solstice 200 1700lm 930 SSC01D GB
2070237

Photobiological Risk Group	RG0
Total power consumption (W)	17
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9005 - Jet black
IP rating	IP40/20
IK rating	IK02
Product EAN number	5025768702374
Warranty	5 years
Dimming method	SylSmart SSC
Useful luminous flux (#use)	1700

Photometry

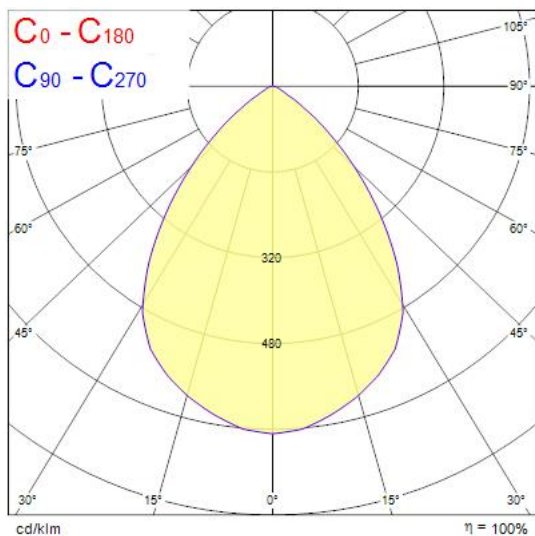

Technical drawings

