


Concord

Solstice 150 1550lm 930 DALI Sandblast 2070414

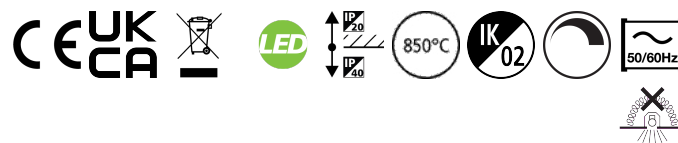

Features

- Solstice 150 1550lm 930 DALI Sandblast is an efficient DALI dimmable downlight luminaire, Colour rendering index Ra>90, Colour temperature: 3000K Warm White, Class II, Protection rating IP40/IP20, Cut out dimensions: 150mm.

Product Overview


| | |
|-----------------------------------|--|
| Product name | Solstice 150 1550lm 930 DALI Sandblast |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Ceiling recessed mounting |
| General application | Hospitality, Office, Retail |
| ETIM Class | EC001744 |
| E-number FI | 4170375 |
| Fixture luminous flux (lm) | 1550 |
| Luminaire efficacy (lm/W) | 127 |
| LOR (%) | 103 |
| Correlated colour temperature (k) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 90 |
| Colour Consistency (SDCM) | 3 |
| Colour Variation Initial (SDCM) | 3 |
| Beam Angle (°) | 70 |
| Glare control | < 19 |
| Photobiological Risk Group | RG1 |

Concord

Solstice 150 1550lm 930 DALI Sandblast 2070414

| | |
|-----------------------------|--|
| Total power consumption (W) | 15 |
| Electrical protection | Class II |
| Control gear type | LED driver constant current |
| Dimmable | Yes |
| Minimum dimming level (%) | 1 |
| LED Flickering Rate | Ultra low (5% or less) |
| Housing colour | RAL9016 |
| IP rating | IP40/20 |
| IK rating | IK02 |
| Product EAN number | 5025768704149 |
| Warranty | 5 years |
| Dimming method | DALI, DALI-2, Switch-dim (mains-rated) |

Photometry

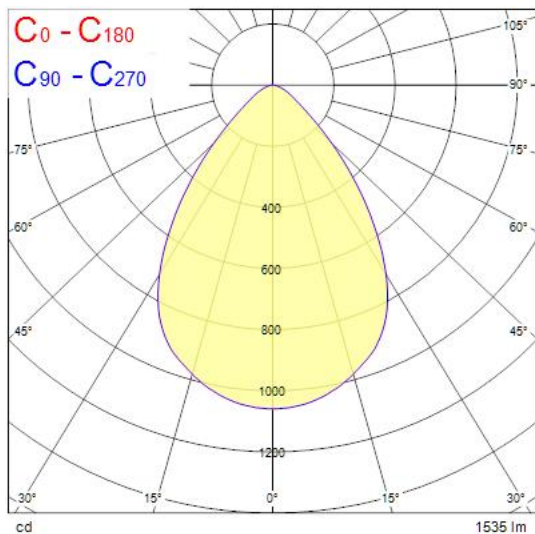

Technical drawings

