

Features

- IP44 from the front round LED downlight with polycarbonate diffuser with a white bezel. Polycarbonate diffuser with a white bezel. Shallow recess depth (<65mm). Available in 12, 15, 21 & 25W in 150mm, 175mm, 205mm & 225mm cut out sizes. Perfect for up to 2x26W CFL replacement. Includes loop-in loop-out facility for quick installation.


Product Overview

Product name	Insaver HO Topper LED II 175 RO 15W NW
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number SE	7465673
Fixture luminous flux (lm)	1550
Luminaire efficacy (lm/W)	103
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	74
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	15

Insaver HO Topper LED II 175 RO 15W NW 3033937

Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9010
IP rating	IP44/20
IK rating	IK07
Product EAN number	8711971339373
Warranty	5 years
Dimming method	N/A

Photometry

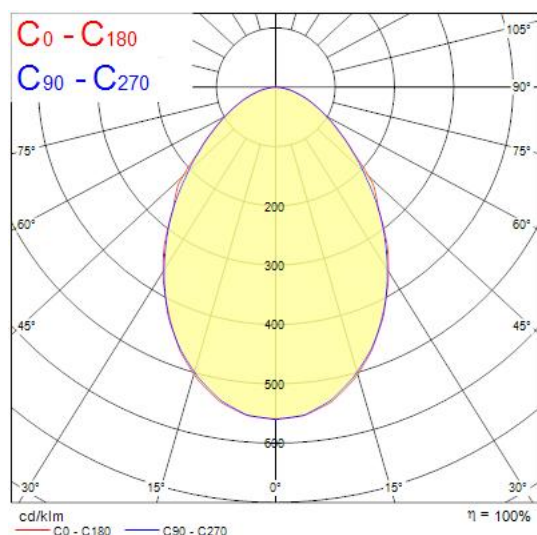

Technical drawings

