



Features

- IP44 from the front round LED downlight with polycarbonate diffuser with a white bezel. Polycarbonate diffuser with a white bezel. Shallow recess depth (<65mm). Available in 12, 15, 21 & 25W in 150mm, 175mm, 205mm & 225mm cut out sizes. Perfect for up to 2x26W CFL replacement. Includes loop-in loop-out facility for quick installation.


Product Overview

| | |
|-----------------------------------|--|
| Product name | Insaver HO Topper LED II 225 RO 25W WW |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Ceiling recessed mounting |
| Environment | Interior |
| General application | Hospitality, Office, Retail |
| ETIM Class | EC001744 |
| E-number SE | 7465636 |
| Fixture luminous flux (lm) | 2350 |
| Luminaire efficacy (lm/W) | 102 |
| LOR (%) | 100 |
| Correlated colour temperature (k) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 3 |
| Beam Angle (°) | 74 |
| Glare control | < 23 |
| Photobiological Risk Group | RG0 |
| Total power consumption (W) | 25 |

Insaver HO Topper LED II 225 RO 25W WW 3033948

| | |
|-----------------------|-----------------------------|
| Electrical protection | Class II |
| Control gear type | LED driver constant current |
| Dimmable | No |
| LED Flickering Rate | Ultra low (5% or less) |
| Housing colour | RAL9010 |
| IP rating | IP44/20 |
| IK rating | IK07 |
| Product EAN number | 8711971339489 |
| Warranty | 5 years |
| Dimming method | N/A |

Photometry

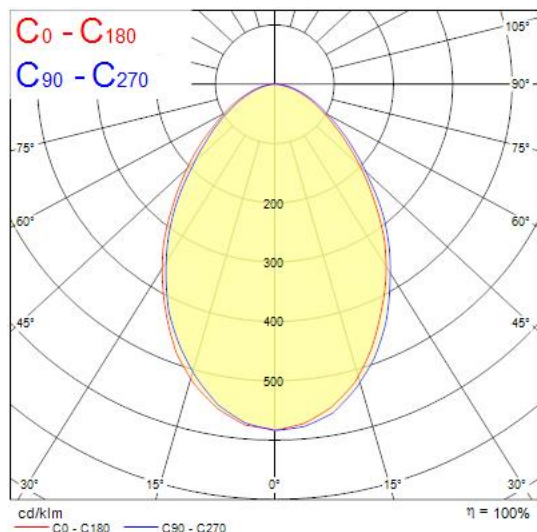

Technical drawings

