

Insaver HO Topper LED II 225 RO 25W WW 3033948



Features

- IP44 from the front round LED downlight with polycarbonate diffuser with a white bezel. Polycarbonate diffuser with a white bezel. Shallow recess depth (<65mm). Available in 12, 15, 21 & 25W in 150mm, 175mm, 205mm & 225mm cut out sizes. Perfect for up to 2x26W CFL replacement. Includes loop-in loop-out facility for quick installation.

Product Overview

Product name	Insaver HO Topper LED II 225 RO 25W WW
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number SE	7465636
Fixture luminous flux (lm)	2350
Luminaire efficacy (lm/W)	102
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	74
Glare control	< 23
Photobiological Risk Group	RG0
Total power consumption (W)	25


Light your world

Insaver HO Topper LED II 225 RO 25W WW


3033948

Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9010
IP rating	IP44/20
IK rating	IK07
Product EAN number	8711971339489
Warranty	5 years
Dimming method	N/A

Photometry

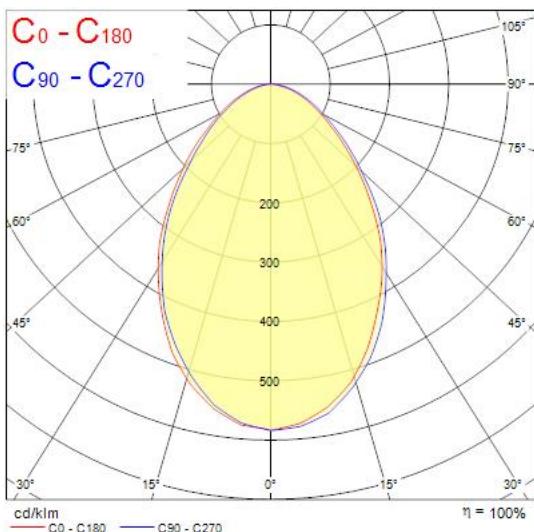

Technical drawings

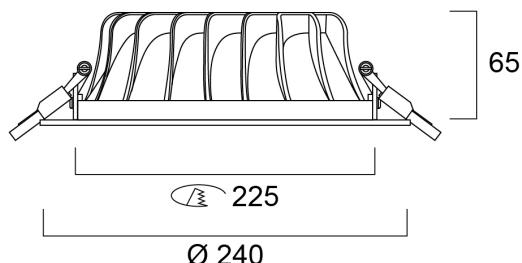

Light your world