

Features

• Insaver is a ceiling recessed LED downlight (IP54 from the front),Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 4000K; UGR <22 with shallow product depth 60mm. The range features a multipower functionality where the luminous flux of the luminaire can be tailored to local needs by only setting a quick selector switch on the driver (33W 4150lm, 35W 4300lm, 36W 4450lm, 41W 4950lm). Meets TP(a) requirements.


Product Overview

Product name	Insaver IP54 225 4150- 4950LM 840 Multi
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4278535
Fixture luminous flux (lm)	4950
Luminaire efficacy (lm/W)	121
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Glare control	< 22
Photobiological Risk Group	RG1
Total power consumption (W)	41
Electrical protection	Class II
Control gear type	LED driver constant current

Insaver IP54 225 4150- 4950LM 840 Multi
0030509

Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9010
IP rating	IP54/20
IK rating	IK07
Product EAN number	5410288305097
Warranty	5 years
Dimming method	N/A

Photometry

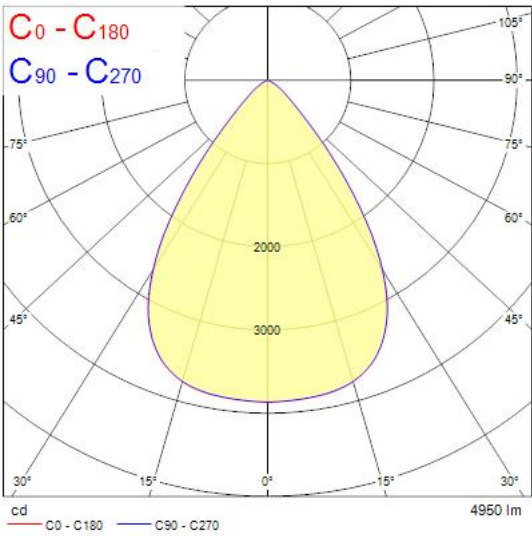

Technical drawings

