

### Features

- START Panel is a range of backlit LED panels used in recessed ceilings. Ideal for general indoor applications such as corridors, breakrooms, offices and meeting rooms. Luminaire dimensions are compatible with common ceiling installation, and the shallow design makes it easy to install in low ceilings. 4000Lm; 43W; 93Lm/W; Drive current: 950mA; Average lifespan: 90000Hrs; 4000K; CRI 90; Glare control <19; IK03; IP40 (from the front); SDCM<3; Class II; Loop in loop out connector for quick installation; DALI dimmable.


### Product Overview

Product name	START Panel UGR19 600x600 DALI 4000lm 940
Technology	LED
Cap/Base	N/A
Housing	Aluminium, Steel
Mount	Ceiling recessed mounting
General application	Education, Office
ETIM Class	EC002892
E-number FI	4278378
Fixture luminous flux (lm)	4000
Luminaire efficacy (lm/W)	93
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	90
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	43
Electrical protection	Class II

## START Panel UGR19 600x600 DALI 4000lm 940 0041269

Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9003
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288412696
Warranty	5 years
Dimming method	DALI
Useful luminous flux (#use)	4000

### Photometry

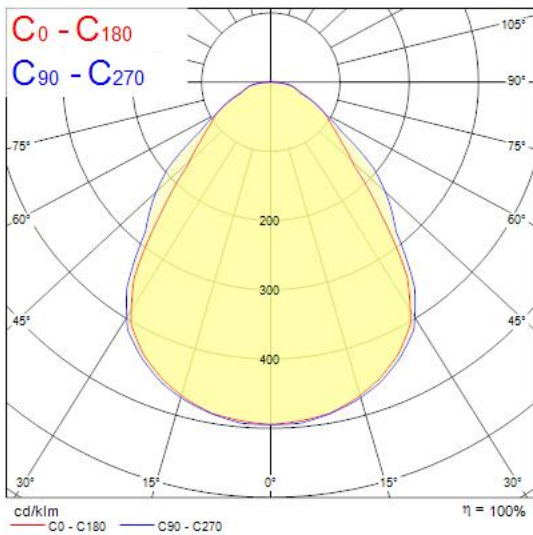

### Technical drawings

