



Features

• OPTICLIP 1200 3000K C8 HO WH DALI WHITE is a high efficacy low glare luminaire with replaceable light engines for office and education applications. Ceiling recessed LED luminaire with white colour plastic optic, direct light distribution, luminaire dimensions: 1195x295x20mm, Sylvania White body colour (RAL9016), IP40 (from the front), IK07, DALI Dimmable, low LED flicker (+/-5%), Warm White (3000K) LED Colour Temperature, 4250lm luminous flux, 34W power consumption, 125lm/W system efficacy, CRI>80, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<17, Luminance at 65° < 2000 cd/m², lifespan: 62,000 hours L80B20, photobiological safety risk group 1. Electrical protection Class II. Glow wire test 850°C.


Product Overview

Product name	OptiClip 1200 3000K C8 2L HO WH DALI WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Education, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	4250
Luminaire efficacy (lm/W)	125
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	78
Glare control	< 17

OptiClip 1200 3000K C8 2L HO WH DALI WHITE 0043007

Photobiological Risk Group	RG1
Total power consumption (W)	34
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Product EAN number	5410288430072
Warranty	5 years
Dimming method	DALI
Useful luminous flux (#use)	4250

Photometry

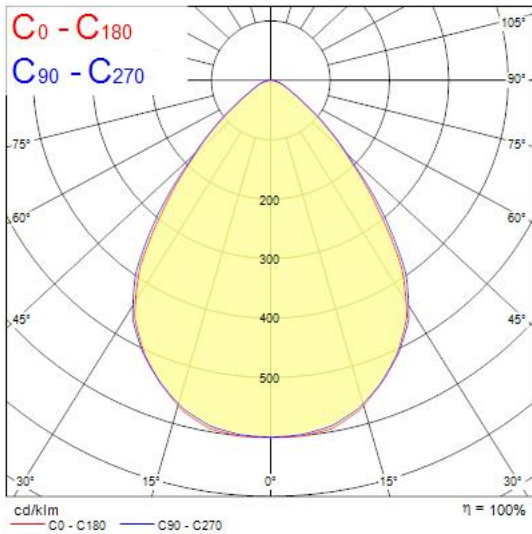

Technical drawings

